

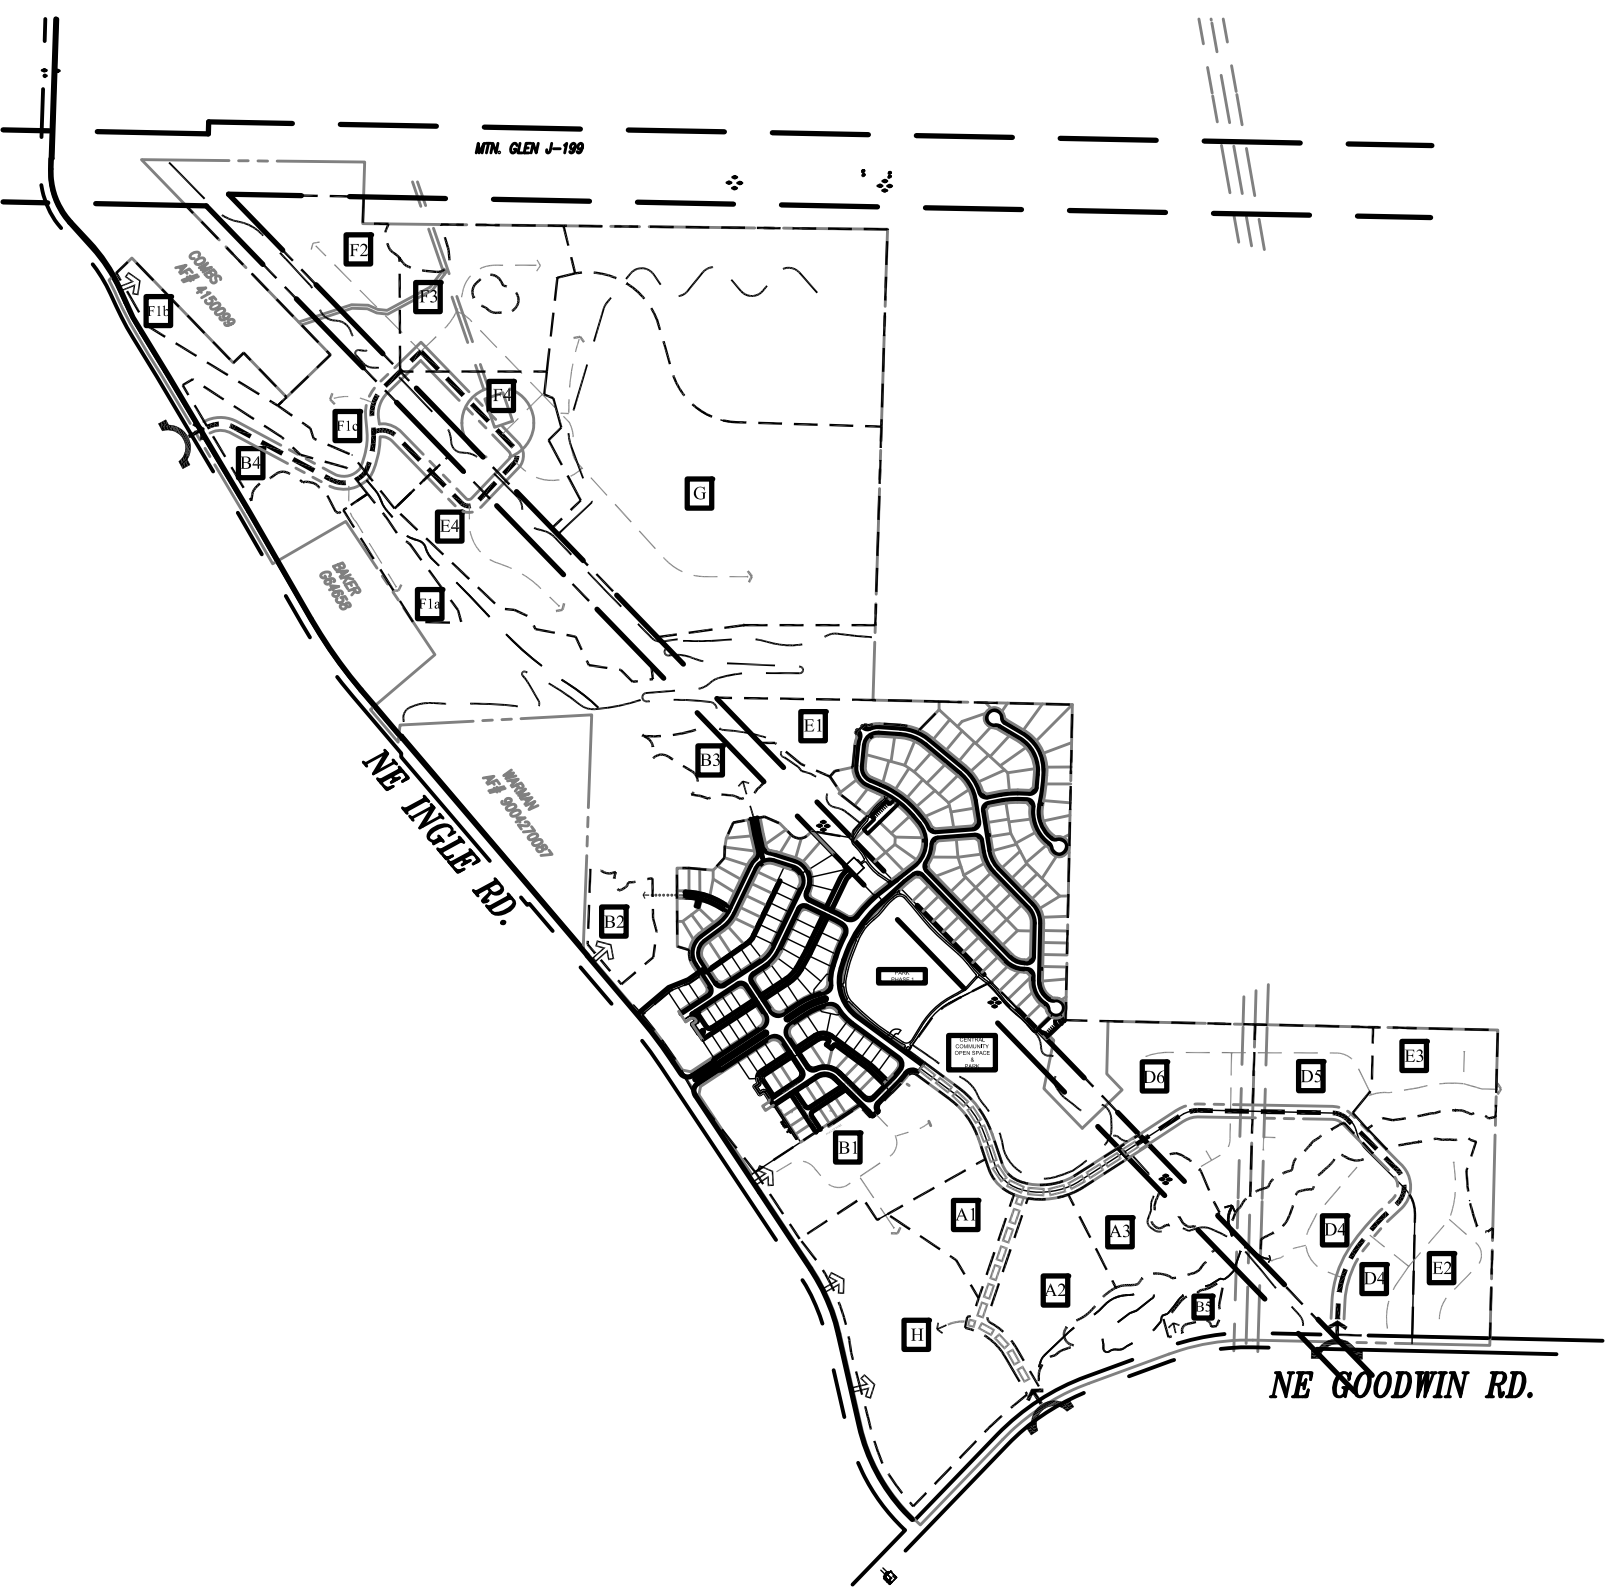


GREEN MOUNTAIN
DEVELOPMENT STANDARDS & PHASING PLAN

CAMAS, WASHINGTON
GREEN MOUNTAIN LAND, LLC.

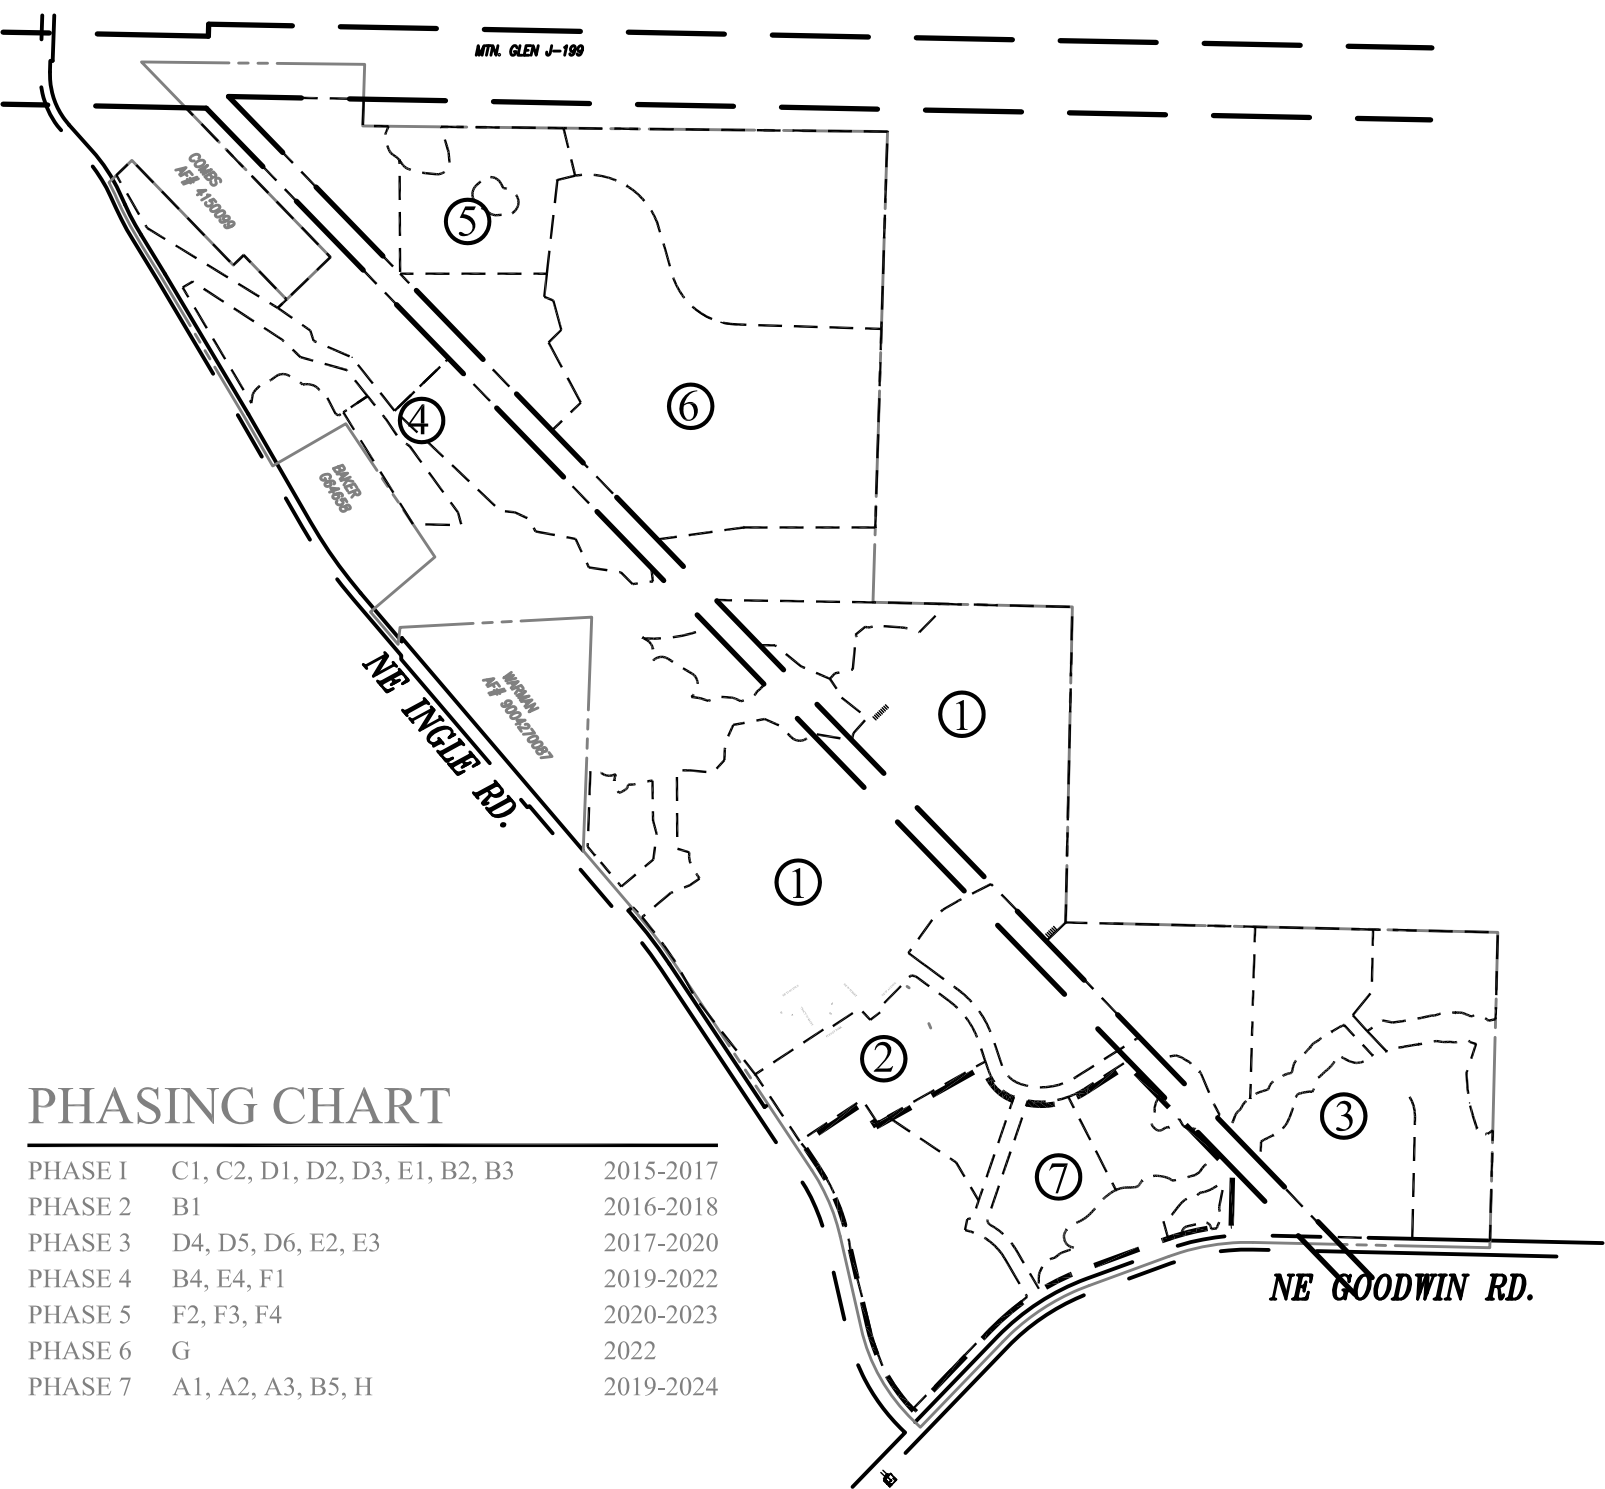


PLANNING UNITS



PHASING CHART

PHASE 1	C1, C2, D1, D2, D3, E1, B2, B3	2015-2017
PHASE 2	B1	2016-2018
PHASE 3	D4, D5, D6, E2, E3	2017-2020
PHASE 4	B4, E4, F1	2019-2022
PHASE 5	F2, F3, F4	2020-2023
PHASE 6	G	2022
PHASE 7	A1, A2, A3, B5, H	2019-2024

PHASING PLAN



PLANNING STANDARDS

URBAN VILLAGE AREA

URBAN VILLAGE AREA - Mixed Use, Community Commercial, A and B PODS	
Urban Village Area	Minimum of 8.8 acres with ground floor Employment/Commercial Use (as provided for in 18.07.030 Table 1). Allow horizontal and vertical Mixed Use. PODs H, A1, A2, A3, B5 and 100 Units at the Village Center


DENSITY & DIMENSIONS

Green Mountain PRD PODs A-G and corresponding Camas Zones			
	A POD	B POD	C POD
DENSITY	MF-24	MF-18	MF-10
Max. dw./gross ac.	24	18	10
Min. dw./gross ac.	6	6	6
STANDARD LOTS			
Min. lot SF	3,400 <i>a</i>	3,400 <i>a</i>	3,000 <i>a</i>
Min. lot width	20	20	30
Min. lot depth	40 <i>b</i>	40 <i>b</i>	70
Max. Floor Area per du.	No Max	No Max	No Max
SETBACKS			
Min. front/at garage	10/16 <i>c</i>	10 <i>c</i>	10/18
Min. side	5 <i>d</i>	5 <i>d</i>	5 <i>d</i>
Min. side flanking street	15 <i>e</i>	15 <i>e</i>	15 <i>e</i>
Min. rear <i>garage</i>	10 <i>f</i>	10 <i>f</i>	10 <i>f</i>
Min. rear <i>garage</i>	10 <i>f</i>	10 <i>f</i>	10 <i>f</i>
LOT COVERAGE, Max.	75% <i>g</i>	66% <i>g</i>	55%
BUILDING HEIGHT, Max.	45 <i>h</i>	45 <i>h</i>	35 <i>h</i>

a. Single Family Detached homes to be permitted. For SPD in A POD apply B Pod setbacks.
b. 10 foot rear yard for front access garage.
c. Minimum rear yard for alley accessed garage is either 4' or 18'.
d. Minimum side yard at alley is 5'.
e. Franchise utilities to be located in front or side yard easements abutting right of way.
f. The non-attached side of a dwelling unit shall be three feet, otherwise a zero-lot line is assumed.
g. Maximum building height: three stories and a basement but not to exceed maximum building height.


Density Transfer Lots	D POD	E POD	F POD	G POD
DENSITY	R-5	R-6	R-7.5	R-20
Max. dw./gross ac.	8.7	7.2	5.8	2.1
DENSITY TRANSFER LOTS				
Min. lot size (sq. ft.)	3,500 <i>a</i>	4,200	5,250	14,000
Max. lot size (sq. ft.)	4,200 <i>a</i>	5,250 <i>a</i>	14,000 <i>a</i>	80,000 <i>a</i>
Min. lot width	40	50	60	90
Min. lot depth	80	80	80	100
LOT COVERAGE, Max.	45%	40%	40%	30%
BUILDING HEIGHT, MAX. (ft.)	35	35	35	35
SETBACKS based on max. lot size				
Min. front/at garage	15-10/18	20-15/18	20	30
Min. side and corner lot rear yard (ft.)	5 <i>d</i>	5	5	15
Min. side yard flanking a street	15 <i>e</i>	20 <i>e</i>	20 <i>e</i>	30
Min. rear <i>garage</i>	10-15 <i>f</i>	10-20 <i>f</i>	10-20 <i>f</i>	30
Min. lot frontage on a cul-de-sac or curve (ft.)	25	30	30	40

a. Single Family detached homes to be permitted.
b. 10 foot rear yard for rear access garage.
c. Minimum rear yard for alley accessed garage is either 4' or 18'.
d. Minimum side yard at alley is 5'.
NOTE: POD lot sizes are not subject to lot size averaging.

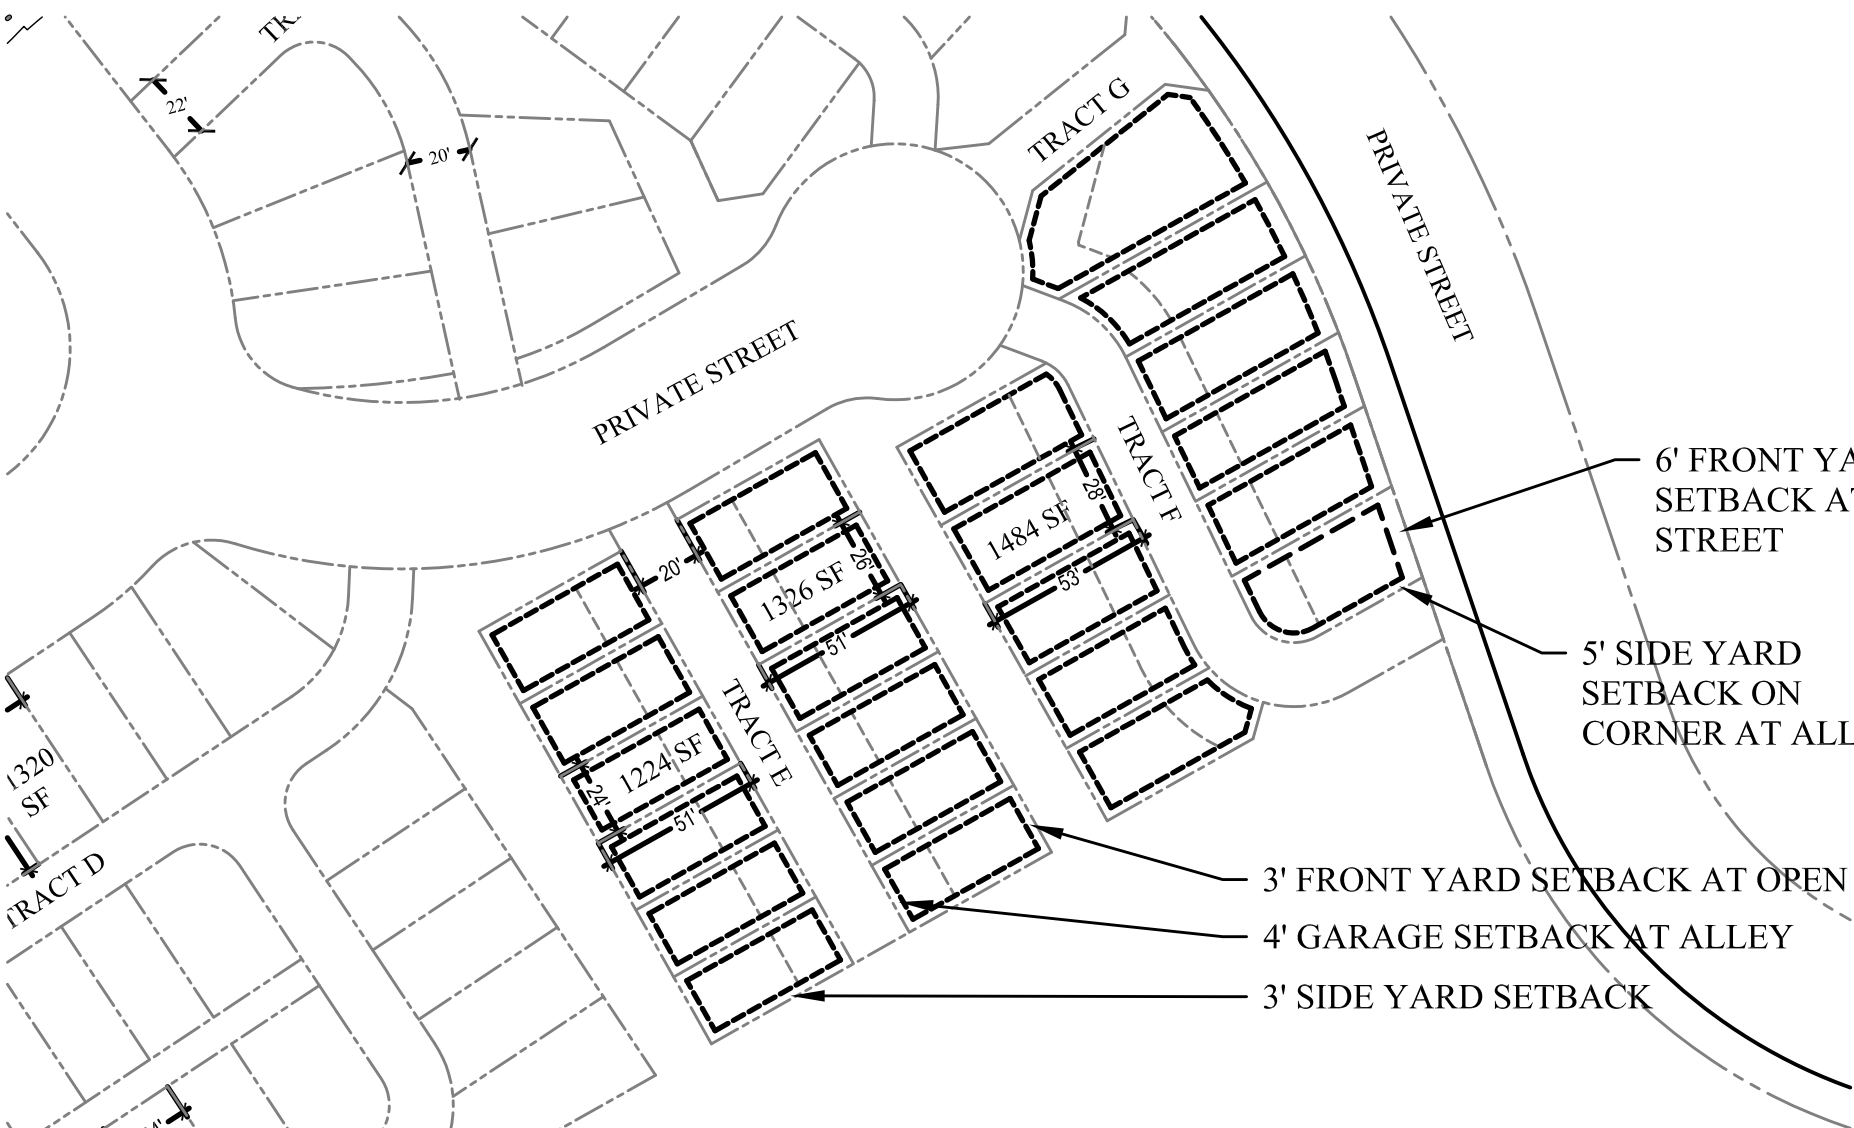


POD B- TYPICAL LOT & DEVELOPMENT PATTERNS

LOT DIMENSIONS & BUILDING ENVELOPES

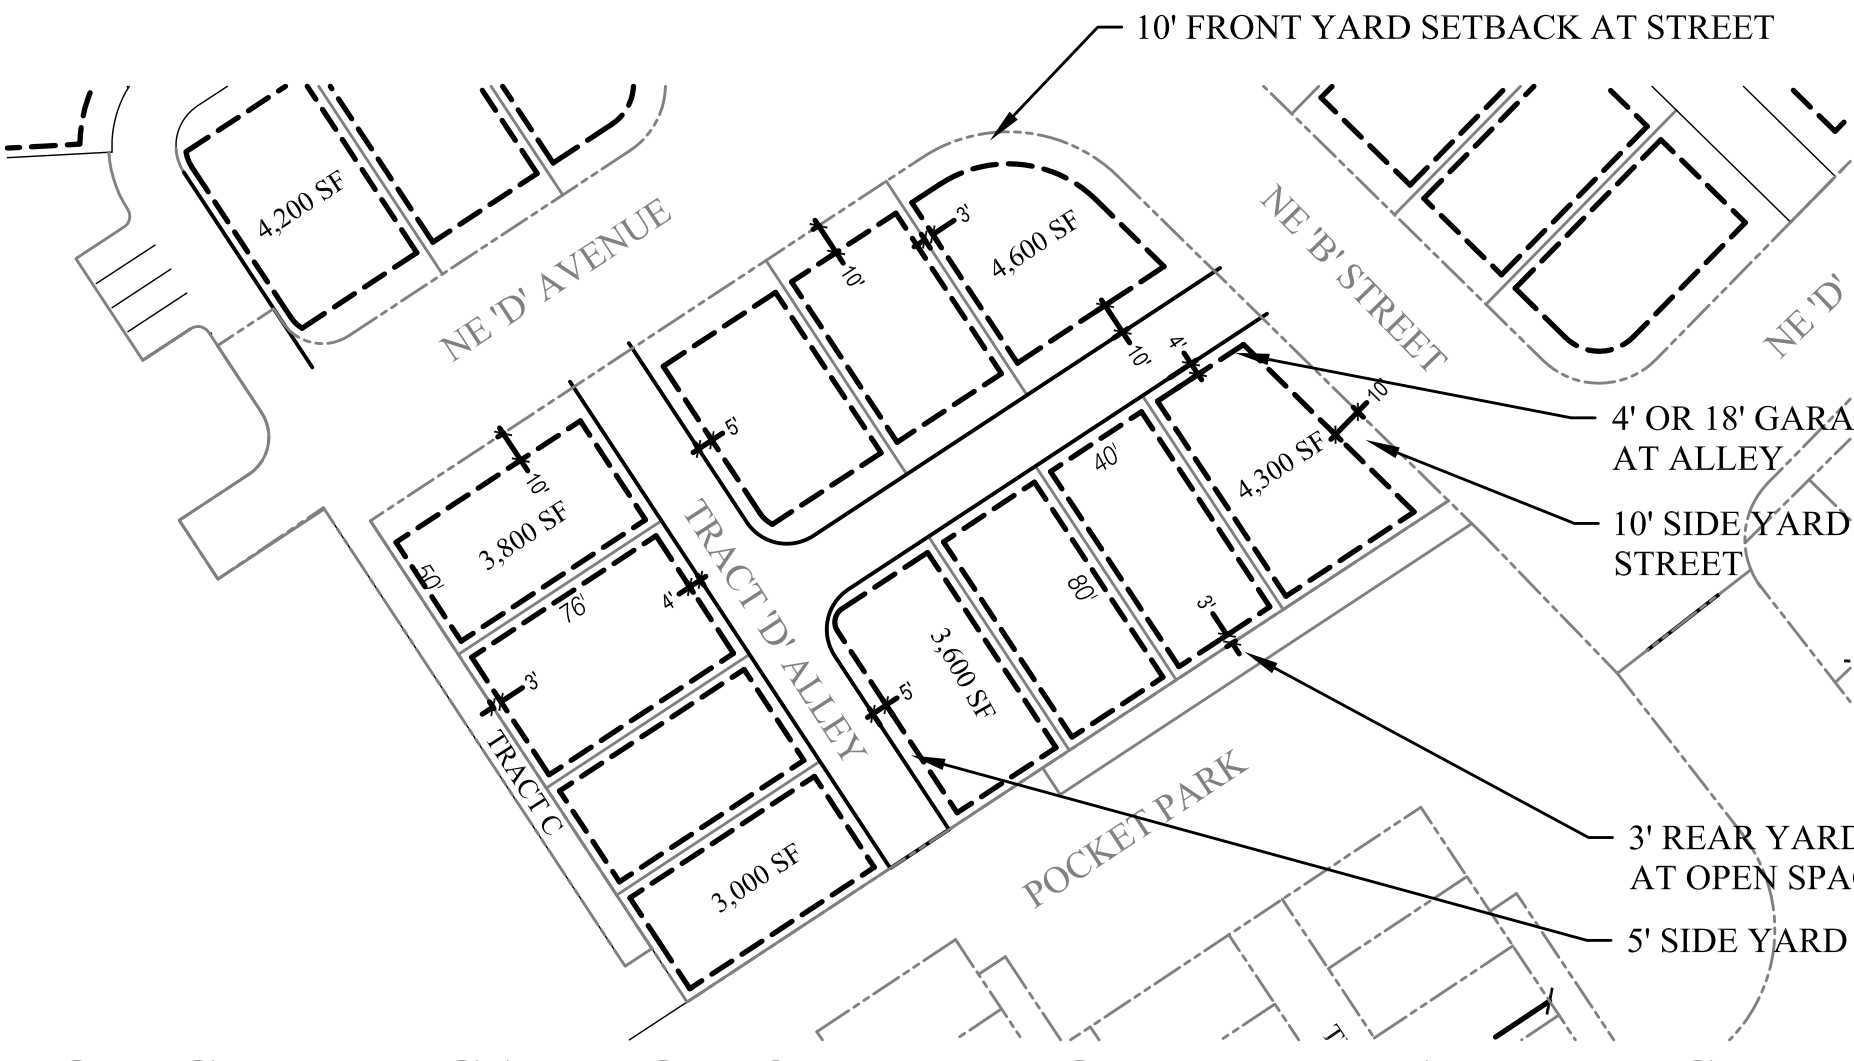

POD C- TYPICAL LOT & DEVELOPMENT PATTERNS

LOT DIMENSIONS & BUILDING ENVELOPES



Land Planning
Landscape
Architecture

P.O. BOX 2392
LAKE OSWEGO, OR
97036
503-294-0222

SCALE: AS NOTED

DESIGNED BY: WPH
DRAWN BY: SH
CHECKED BY: WPH

DATE: 11/09/15
REVISED:



WILLIAM F. HORNING
CERTIFICATE NO. 382

GREEN MOUNTAIN
DEVELOPMENT STANDARDS & PHASING PLAN
GREEN MOUNTAIN LAND, LLC.
CAMAS, WASHINGTON