




Left Elevation
1/8" = 1'-0"

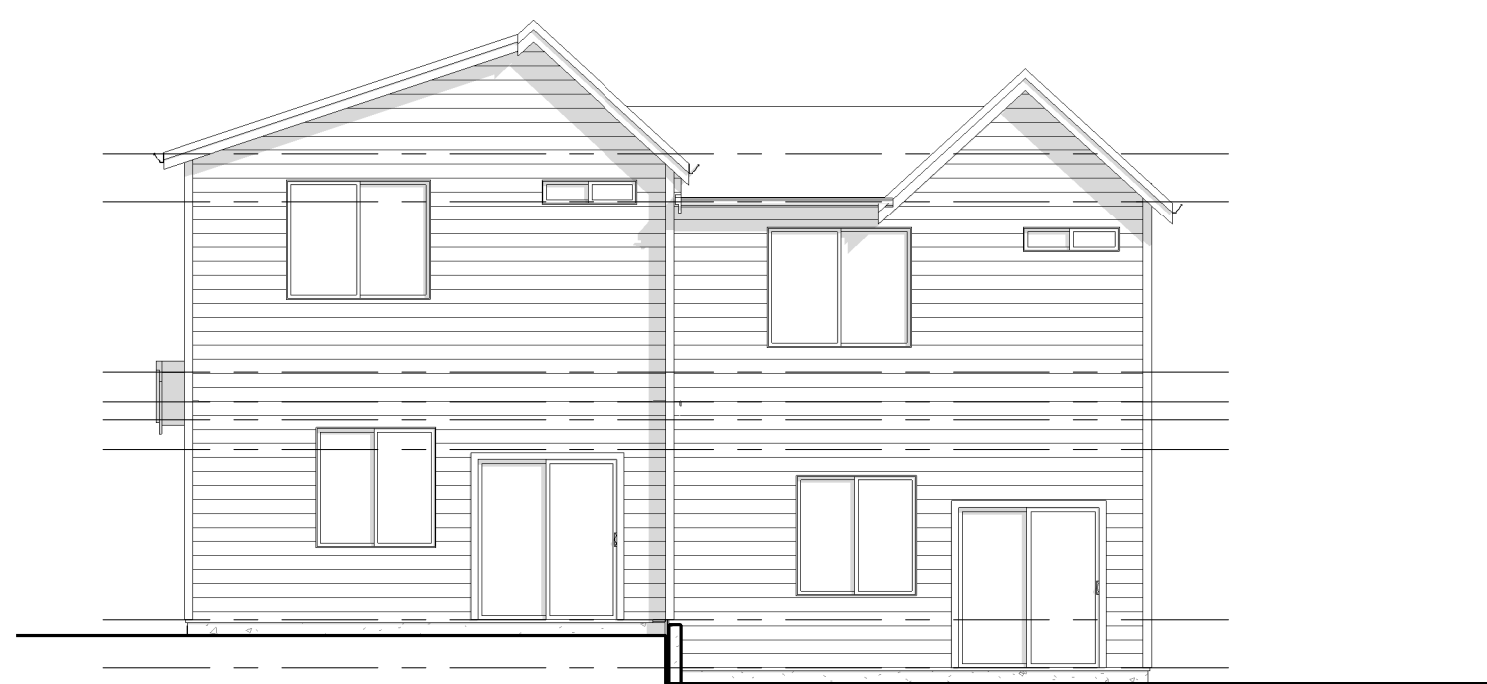

Rear Elevation
1/8" = 1'-0"

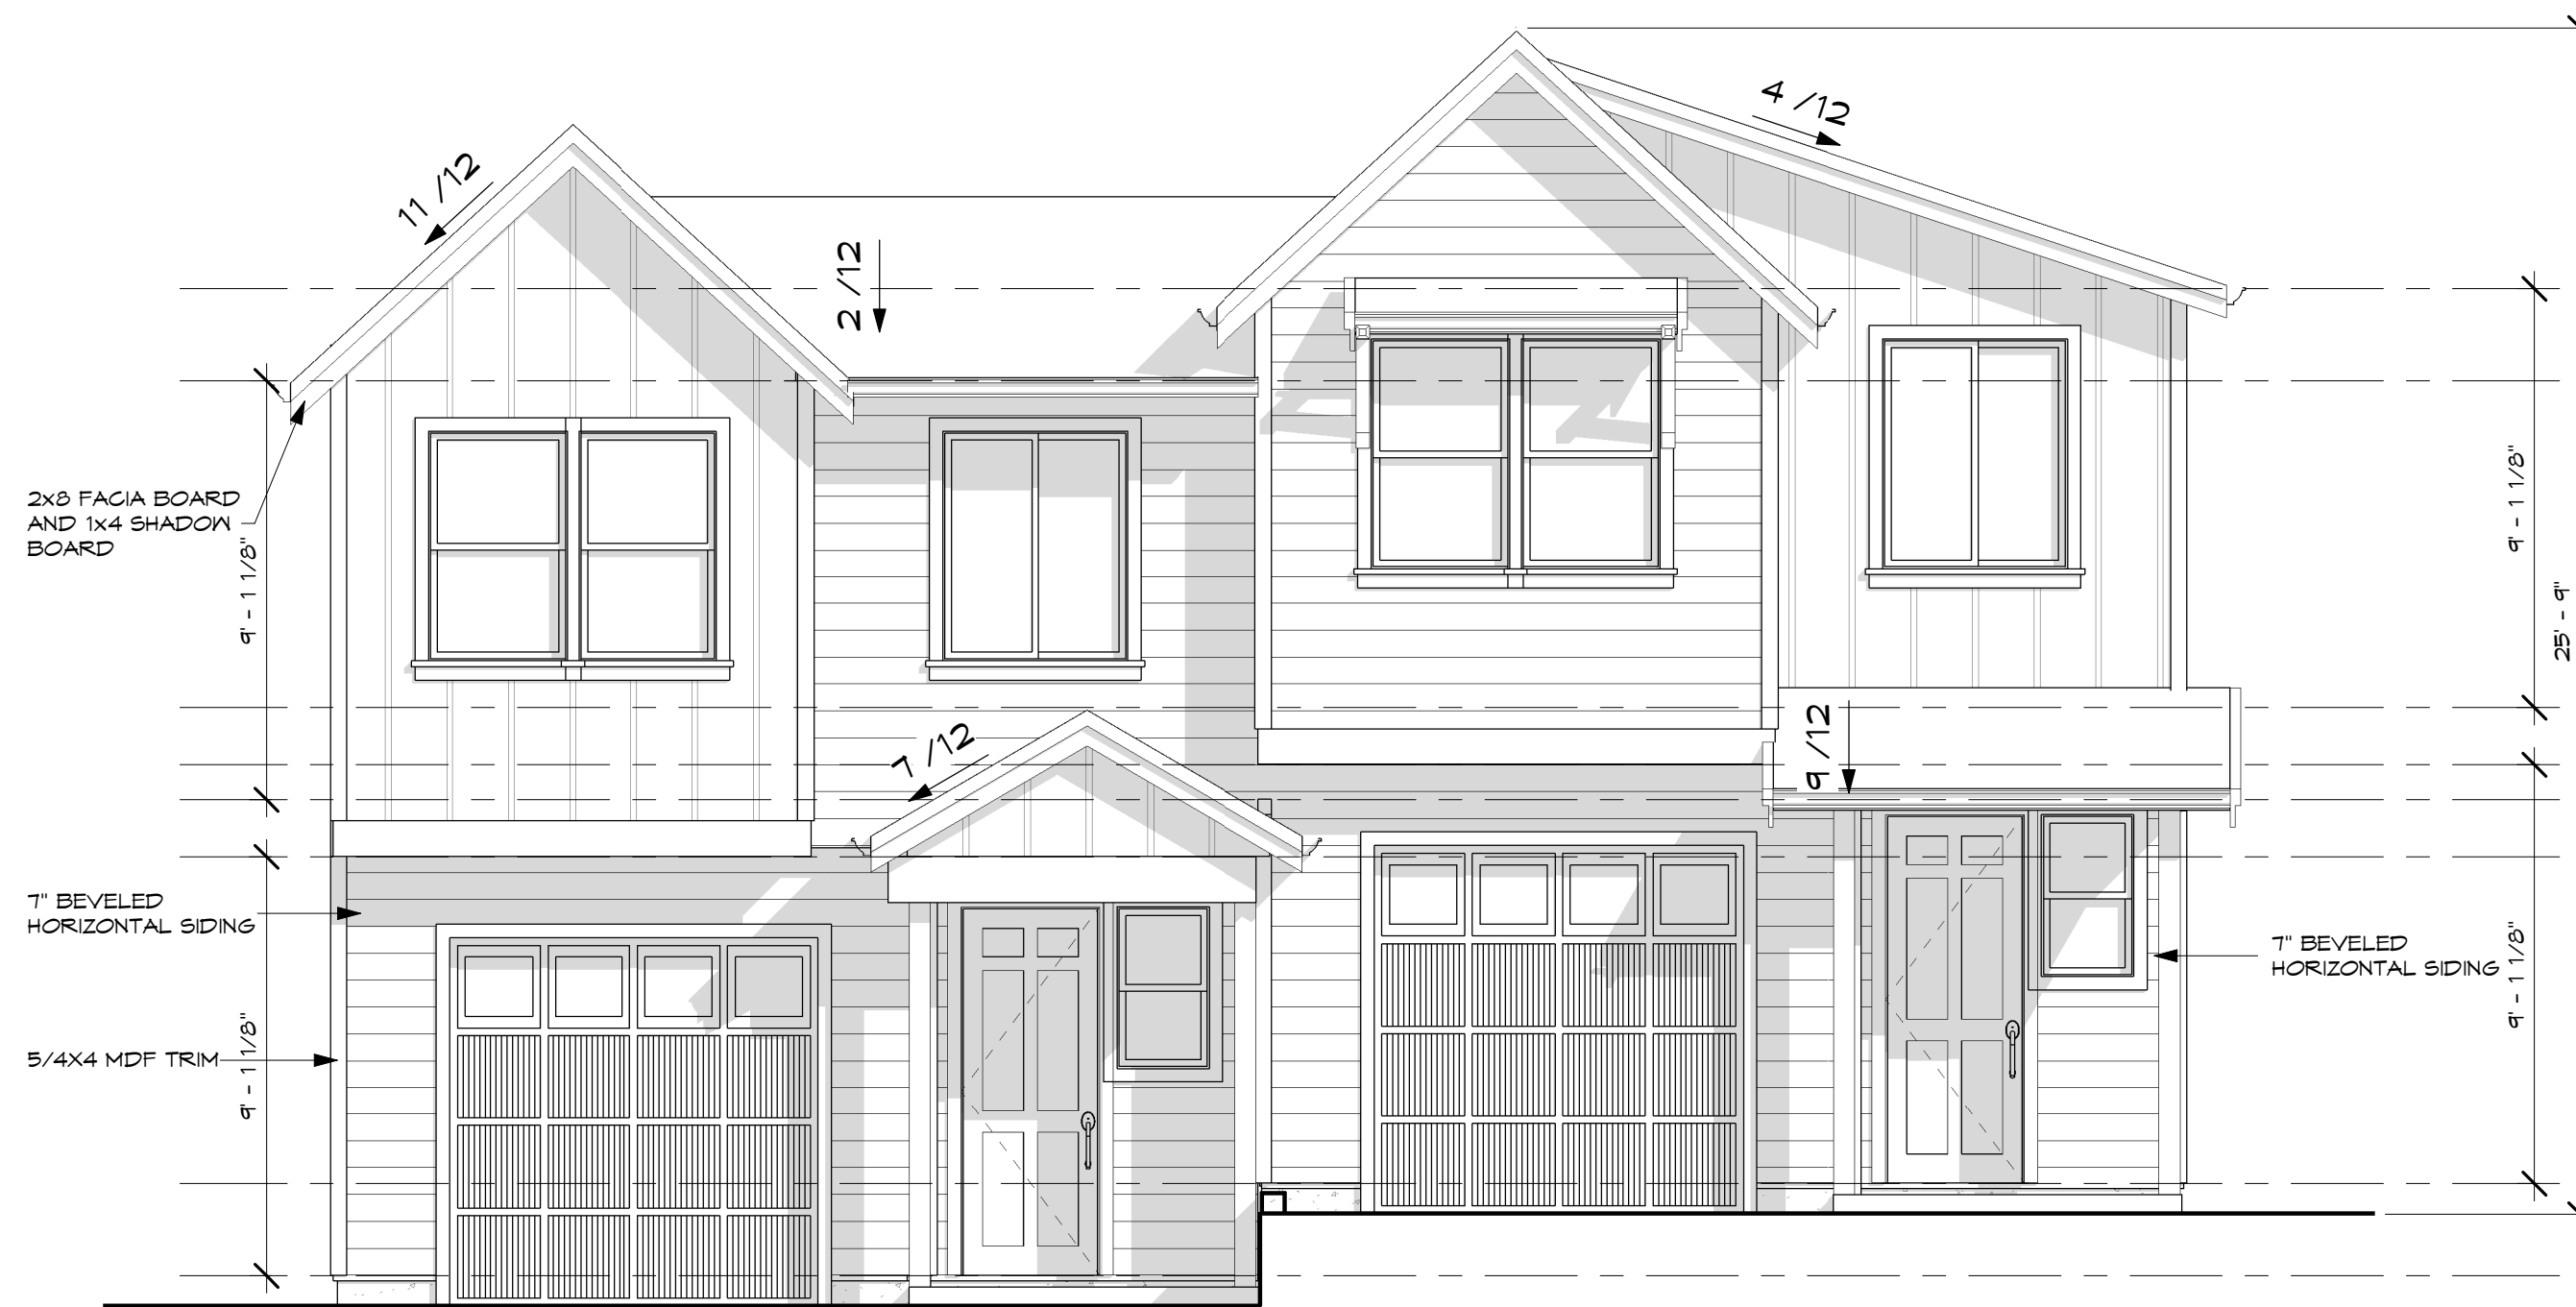


Front Elevation
1/4" = 1'-0"

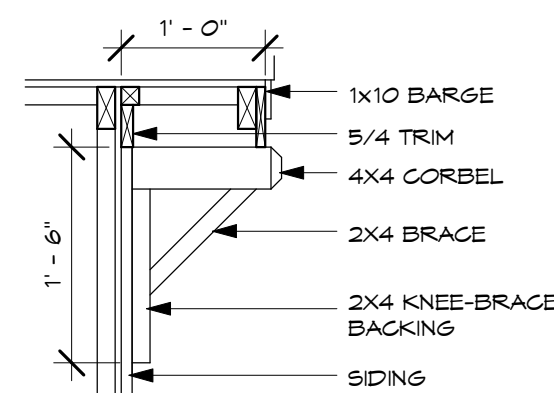

Knee Brace Detail
3/4" = 1'-0"

SIDING TAKEOFF	
Material: Name	Material: Area
1" LAP SIDING STD	2103 SF
BOARD & 1x2 BATT @ 16" O.C.	193 SF

FASCIA SCHEDULE	
Type	Length
Fascia COMBO 1x8 IV 1x4	110' - 11 105/128"

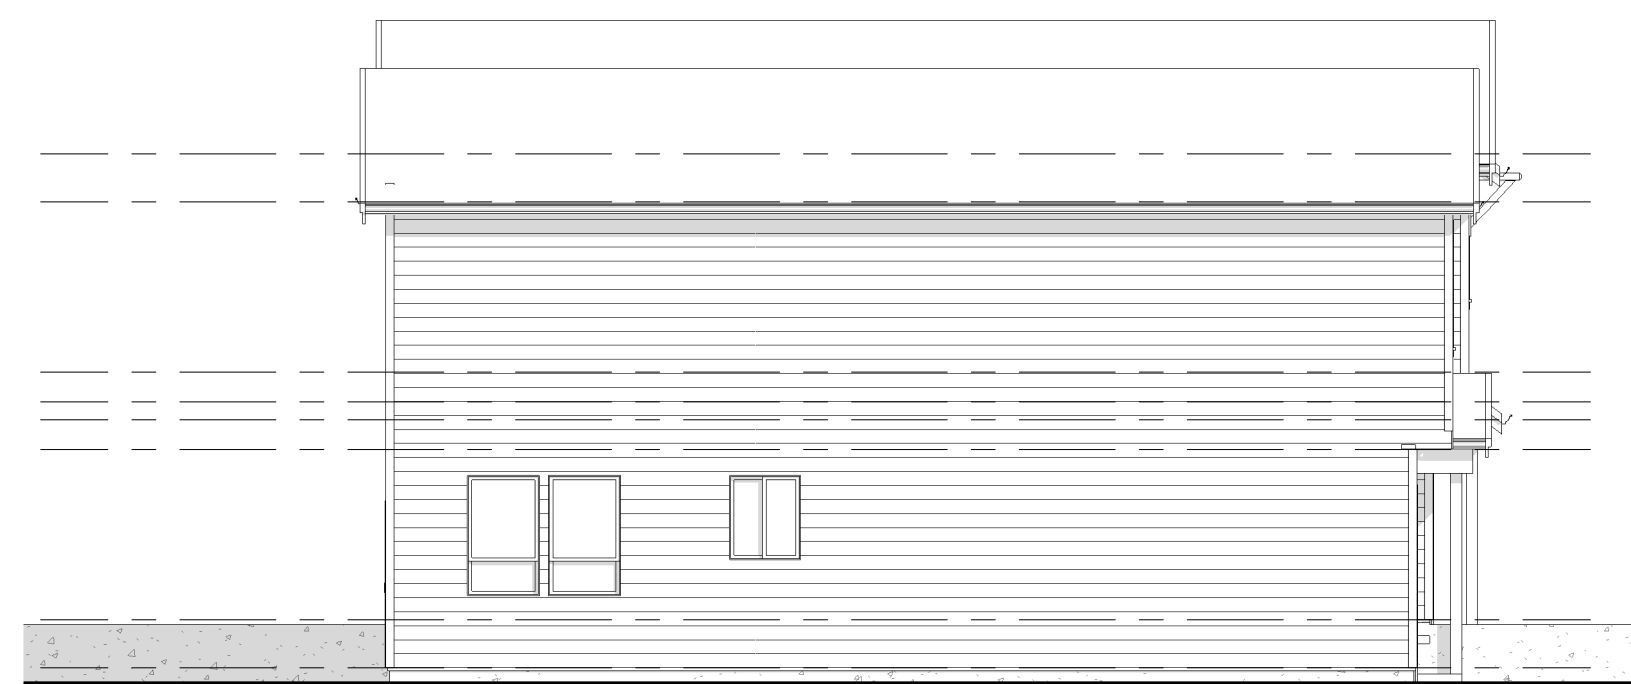

Right Elevation
1/8" = 1'-0"

GENERAL NOTES:

- ALL WORK SHALL BE DONE IN CONFORMANCE WITH THE LATEST EDITION OF LOCAL BUILDING CODE, ONE AND TWO FAMILY DWELLING CODES AND ALL OTHER GOVERNING CODES, LAWS AND REGULATIONS.
- SITE/CONSTRUCTION DOCUMENTS AND CONSTRUCTION PHASE: CONTRACTOR SHALL NOT SCALE THE DRAWINGS, OR DETAILS. CONTRACTOR SHALL VERIFY ALL DIMENSIONS, ELEVATIONS AND CONDITIONS AT THE JOBSITE. NOTIFY DESIGN AGENCY IN WRITING OF ANY SIGNIFICANT DEVIATIONS, ANY CHANGES TO CONSTRUCTION DOCUMENTS OR IF ADDITIONAL DETAILS, SPECIFICATIONS ARE NEEDED FOR PROPER EXECUTION OF THE WORK. ALSO NOTIFY DESIGN AGENCY IN WRITING IF THERE ARE ANY CORRECTIONS OR CHANGES TO BE MADE TO THE CONSTRUCTION DOCUMENTS REQUIRED BY THE PLANNING/BUILDING DEPARTMENT OFFICIALS. PLANS CORRECTION LIST OR COMMENTS (FROM THE PLANNING/BUILDING DEPARTMENT OFFICIALS) MUST BE DELIVERED TO THE DESIGN AGENCY.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR COORDINATION OF ALL TRADES, INCLUDING ALL ARCHITECTURAL, STRUCTURAL, MECHANICAL AND ELECTRICAL REQUIREMENTS.
- MECHANICAL AND ELECTRICAL WORK IS ON A CONTRACTOR DESIGN/BUILD BASIS. COORDINATE ALL ARCHITECTURAL AND STRUCTURAL WORK WITH MECHANICAL AND ELECTRICAL REQUIREMENTS.
- ALL DIMENSIONS ARE TO THE FACE OF FRAMING MEMBERS UNLESS NOTED OTHERWISE. ALL EXTERIOR WALLS TO BE 2x6 STUDS AT 16" O.C., ALL INTERIOR WALLS TO BE 2x4 STUDS AT 16" O.C. UNLESS NOTED OTHERWISE.
- COORDINATE ALL ITEMS NOT SHOWN OR NOTED WITH OWNER AND/OR DESIGNER, INCLUDING BUT NOT LIMITED TO FINISHES, COLORS, CABINETS, HARDWARE, FIXTURES, ETC.
- SEAL OR WEATHER STRIP ALL EXTERIOR OPENINGS AND PENETRATIONS IN MANNER TO PREVENT OUTSIDE AIR INFILTRATION AND MOISTURE FROM ENTERING STRUCTURAL AND OCCUPIED SPACES, INCLUDING AROUND PLUMBING AND ELECTRICAL LINES AND EQUIPMENT PASSING THROUGH WALLS, SUTTERS, DOWNPOUTS, ETC.
- IT IS THE GENERAL CONTRACTOR'S RESPONSIBILITY TO FOLLOW AND COORDINATE PER THE MANUFACTURER'S PRINTED INSTRUCTIONS, SPECIFICATIONS AND INSTALLATION DETAILS THE INSTALLATION OF ALL BUILDING PRODUCTS (INTERIOR AND EXTERIOR), FIXTURES, EQUIPMENT, ETC., OR FOLLOW THE INDUSTRY STANDARD DETAILS FOR ALL THE CONDITIONS NOT SHOWN ON THE DRAWINGS FOR PROPER EXECUTION OF THE WORK IN ACCORDANCE WITH THE CONSTRUCTION DOCUMENTS. THE DESIGN AGENCY MUST BE NOTIFIED IN WRITING TO PROVIDE ADDITIONAL DETAILS, SPECIFICATIONS OR INFORMATION PER REQUEST OF THE GENERAL CONTRACTOR OR OWNER FOR PROPER EXECUTION OF THE WORK.

CONSTRUCTION PHASE:

THE DESIGNER SHALL NOT HAVE CONTROL OVER OR CHARGE OF AND SHALL NOT BE RESPONSIBLE FOR CONSTRUCTION MEANS, METHODS, TECHNIQUES, SEQUENCES OR PROCEDURES, OR FOR SAFETY PRECAUTIONS AND PROGRAMS IN CONNECTION WITH THE WORK. SINCE THESE ARE SOLELY THE CONTRACTOR'S RESPONSIBILITY UNDER CONTRACT FOR CONSTRUCTION, THE DESIGNER SHALL NOT BE RESPONSIBLE FOR CONTRACTOR'S SCHEDULES OR FAILURE TO CARRY OUT THE WORK IN ACCORDANCE WITH THE CONSTRUCTION DOCUMENTS.

MATERIAL SPECIFICATION NOTE:

THE DESIGNER DOES NOT RECOMMEND OR SPECIFY USE OF ANY TYPE OF "STUCCO PRODUCTS" OR EXTERIOR INSULATED AND FINISH SYSTEM ("E.I.F.S.") FOR THE EXTERIOR OF THE HOUSE. THE DESIGNER WILL NOT BE LIABLE FOR ANY KIND OF DAMAGES TO THE BUILDING (STRUCTURAL OR COSMETIC) IF THE OWNER OR THE CONTRACTOR DECIDE TO USE SUCH PRODUCTS.

MISCELLANEOUS NOTES:

- EACH BEDROOM TO HAVE A MINIMUM WINDOW OPENING OF 5.7 SQ. FT. WITH A MINIMUM WIDTH OF 20 IN. AND A SILL LESS THAN 44 IN. ABOVE FIN. FLR.
- ALL WINDOWS WITHIN 18 IN. OF THE FLOOR, AND WITHIN 12 IN. OF ANY DOOR ARE TO HAVE TEMPERED GLAZING.
- SKYLIGHTS ARE TO BE GLAZED WITH TEMPERED GLASS ON OUTSIDE AND LAMINATED GLASS ON INSIDE (UNLESS PLEXIGLAS). GLASS TO HAVE MAXIMUM CLEAR SPAN OF 25 IN. AND FRAME IS TO BE ATTACHED TO A 2X CURB WITH A MINIMUM OF 4 IN. ABOVE ROOF PLANE.
- ALL TUB AND SHOWER ENCLOSURES ARE TO BE GLAZED WITH SAFETY GLASS.
- ALL EXTERIOR WINDOWS ARE TO BE DOUBLE-GLAZED AND ALL EXTERIOR DOORS ARE TO BE SOLID CORE WITH WEATHER STRIPPING. PROVIDE 1 IN. DEADBOLT LOCKS ON ALL EXTERIOR DOORS, AND LOCKING DEVICES ON ALL DOORS AND WINDOWS WITHIN 10 FT. (VERTICAL) OF GRADE. PROVIDE PEEP-HOLE 54 - 66 IN. ABOVE FIN. FLOOR ON EXTERIOR ENTRY DOORS.
- CONNECT ALL SMOKE DETECTORS (SEE PLAN FOR LOCATION) TO HOUSE ELECTRICAL SYSTEM AND INTER-CONNECT EACH ONE, SO THAT, WHEN ANY ONE IS TRIPPED, THEY WILL ALL SOUND.
- PROVIDE COMBUSTION AIR VENTS (1/4" SCREEN AND BACK DAMPER) FOR FIREPLACES, WOOD STOVES AND ANY APPLIANCES WITH AN OPEN FLAME.
- BATHROOMS AND UTILITY ROOMS ARE TO BE VENTED TO THE OUTSIDE WITH A FAN CAPABLE OF PRODUCING A MINIMUM OF 4 AIR EXCHANGES PER HOUR. RANGE HOODS ARE ALSO TO BE VENTED TO THE OUTSIDE.
- ELECTRICAL RECEPTACLES IN BATHROOMS, KITCHENS AND GARAGES SHALL BE G.F.I. OR G.F.I.C. PER NATIONAL ELECTRICAL CODE REQUIREMENTS.

AREA CALCS: (LEFT UNIT)

MAIN FLOOR	=	594	SQ. FT.
UPPER FLOOR	=	833	SQ. FT.
TOTAL	=	1427	SQ. FT.
GARAGE + SHOP	=	238	SQ. FT.

AREA CALCS: (RIGHT UNIT)


MAIN FLOOR	=	594	SQ. FT.
UPPER FLOOR	=	826	SQ. FT.
TOTAL	=	1420	SQ. FT.
GARAGE + SHOP	=	238	SQ. FT.

GENERAL FLOOR PLAN NOTES:

- WINDOW SIZES & ROUGH OPENINGS TO BE VERIFIED BY CONTRACTOR.
- WINDOWS THAT ARE BOTH WITHIN 24 INCHES OF A DOOR IN A CLOSED POSITION AND WITHIN 60 INCHES OF THE FLOOR SHOULD BE TEMPERED.
- WINDOWS IN ENCLOSURES FOR BATHTUBS, SHOWERS, HOT TUBS, WHIRLPOOLS, SAUNAS AND STEAM ROOMS WHERE THE GLASS IS WITHIN 60 INCHES ABOVE A DRAIN INLET SHOULD BE TEMPERED.
- WINDOWS WITH A PANE LARGER THAN NINE SQUARE FEET, HAVING A BOTTOM EDGE CLOSER THAN 18 INCHES TO THE FLOOR AND A TOP EDGE HIGHER THAN 36 INCHES ABOVE THE FLOOR SHOULD BE TEMPERED.
- FIREBLOCK ALL PLUMBING PENETRATIONS AND STAIR RUNS.
- ALL WORK IN CONTACT WITH CONCRETE TO BE PRESURE TREATED.
- TOP OF HANDRAILS SHALL BE PLACED AT 36" ABOVE THE NOSING OF TREADS & LANDINGS. HANDRAILS SHALL BE CONTINUOUS THE FULL LENGTH OF THE STAIRS. THE HANDRAIL PORTION SHALL NOT BE LESS THAN 1 1/4" NOR MORE THAN 2" IN OR ORDECTIONAL DIVISION. PROVIDE A SMOOTH SURFACE WITH NO SHARP CORNERS. HANDRAILS PROJECTING FROM A WALL SHALL HAVE A SPACE NOT LESS THAN 1 1/2" BETWEEN THE WALL AND THE HANDRAIL.
- PREFABRICATED FIREPLACES, CHIMNEYS AND RELATED COMPONENTS TO BEAR U.L. OR I.C.B.O. SEAL OF APPROVAL AND TO BE INSTALLED PER MANUFACTURER'S SPECIFICATION.
- ELEV. OF FLOOR OR LANDG 11/2" MAX (OR 13/4" MAX FOR INSURING DR) BELOW THRESHOLD IS REQD FROM THE REQD EXIT DOOR, WHERE DOOR IS NOT THE REQD EXIT DOOR. A STAIRWAY OF 2 OR FEWER RISERS IS PERMITTED WHERE DOOR DOES NOT SWING OVER RISER.


CEILING VENTILATION:

THE NET FREE VENTILATING AREA SHALL NOT BE LESS THAN 1/150 OF THE AREA OF SPACE TO BE VENTILATED, EXCEPT THAT THE AREA MAY BE 1/300, PROVIDED AT LEAST 50% OF THE REQUIRED VENTILATING AREA IS PROVIDED BY VENTILATORS LOCATED IN THE UPPER PORTION OF THE SPACE TO BE VENTILATED AT LEAST 3 FEET ABOVE EAVE VENTS WITH THE BALANCE OF THE REQUIRED VENTILATION PROVIDED BY EAVE VENTS. THE OPENINGS SHALL BE COVERED WITH CORROSION-RESISTANT METAL MESH WITH MESH OPENINGS OF 1/4" IN DIMENSION.

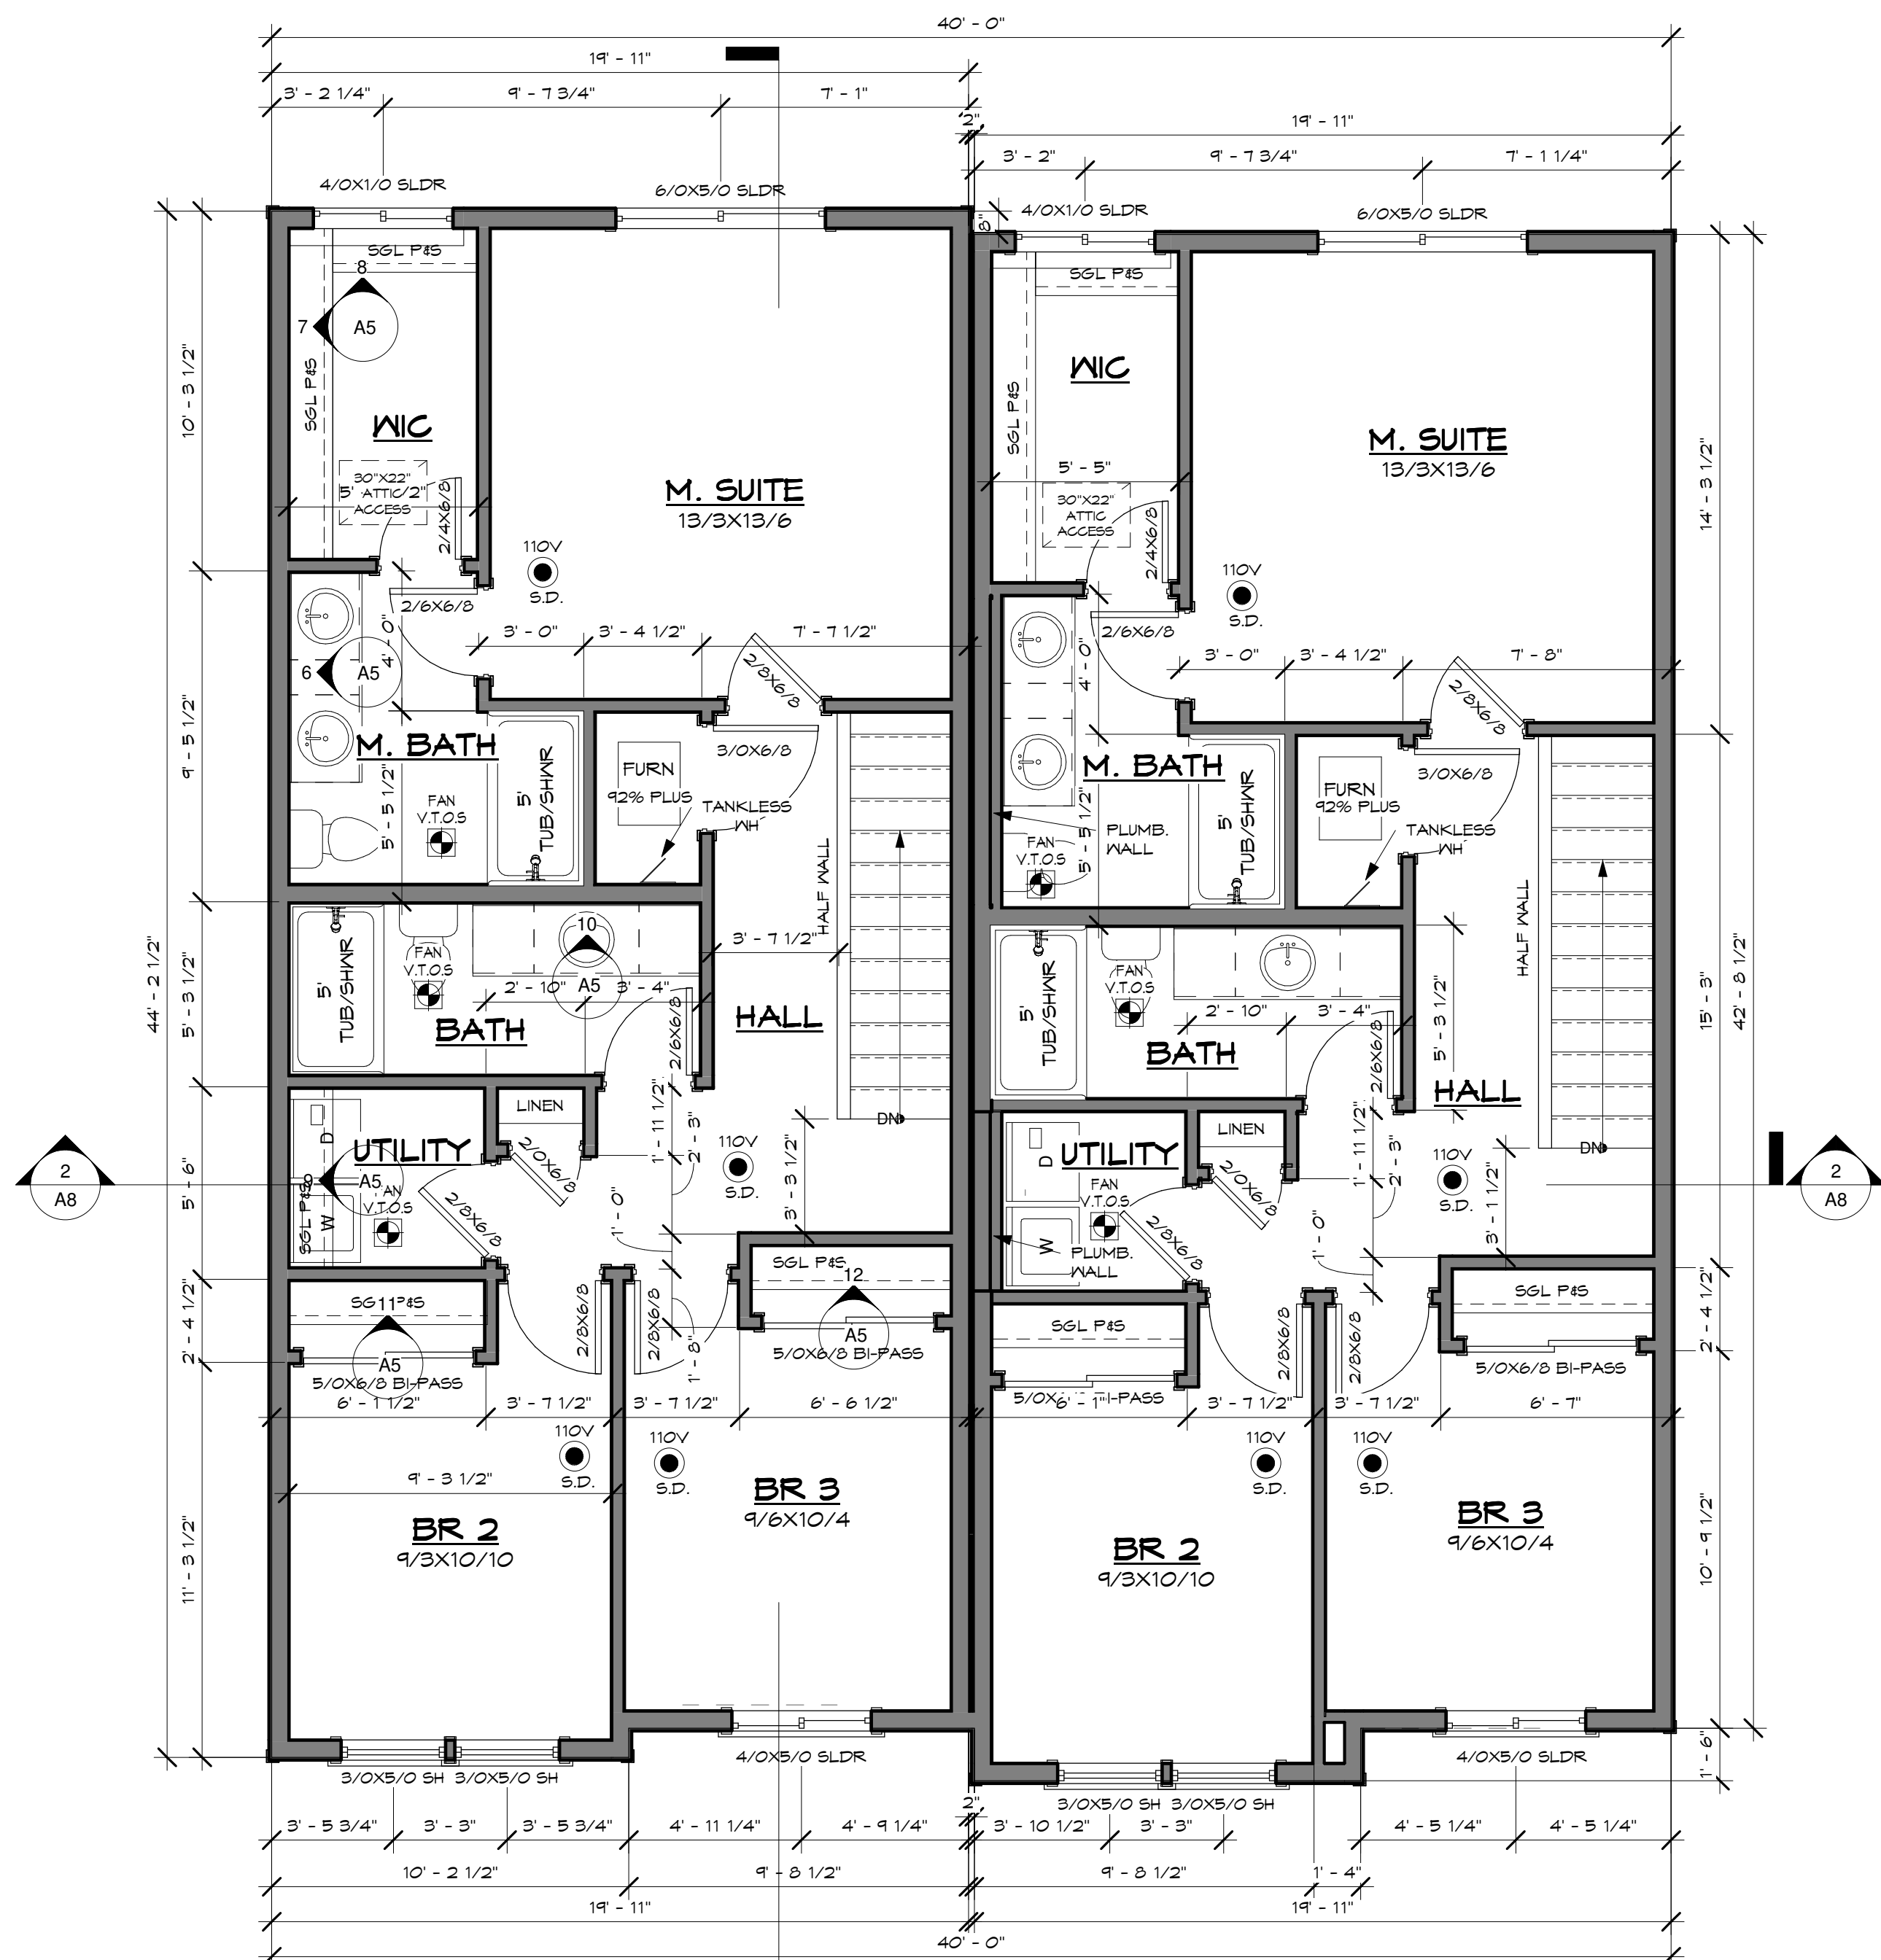

Upper Floor Plan

1/4" = 1'-0"

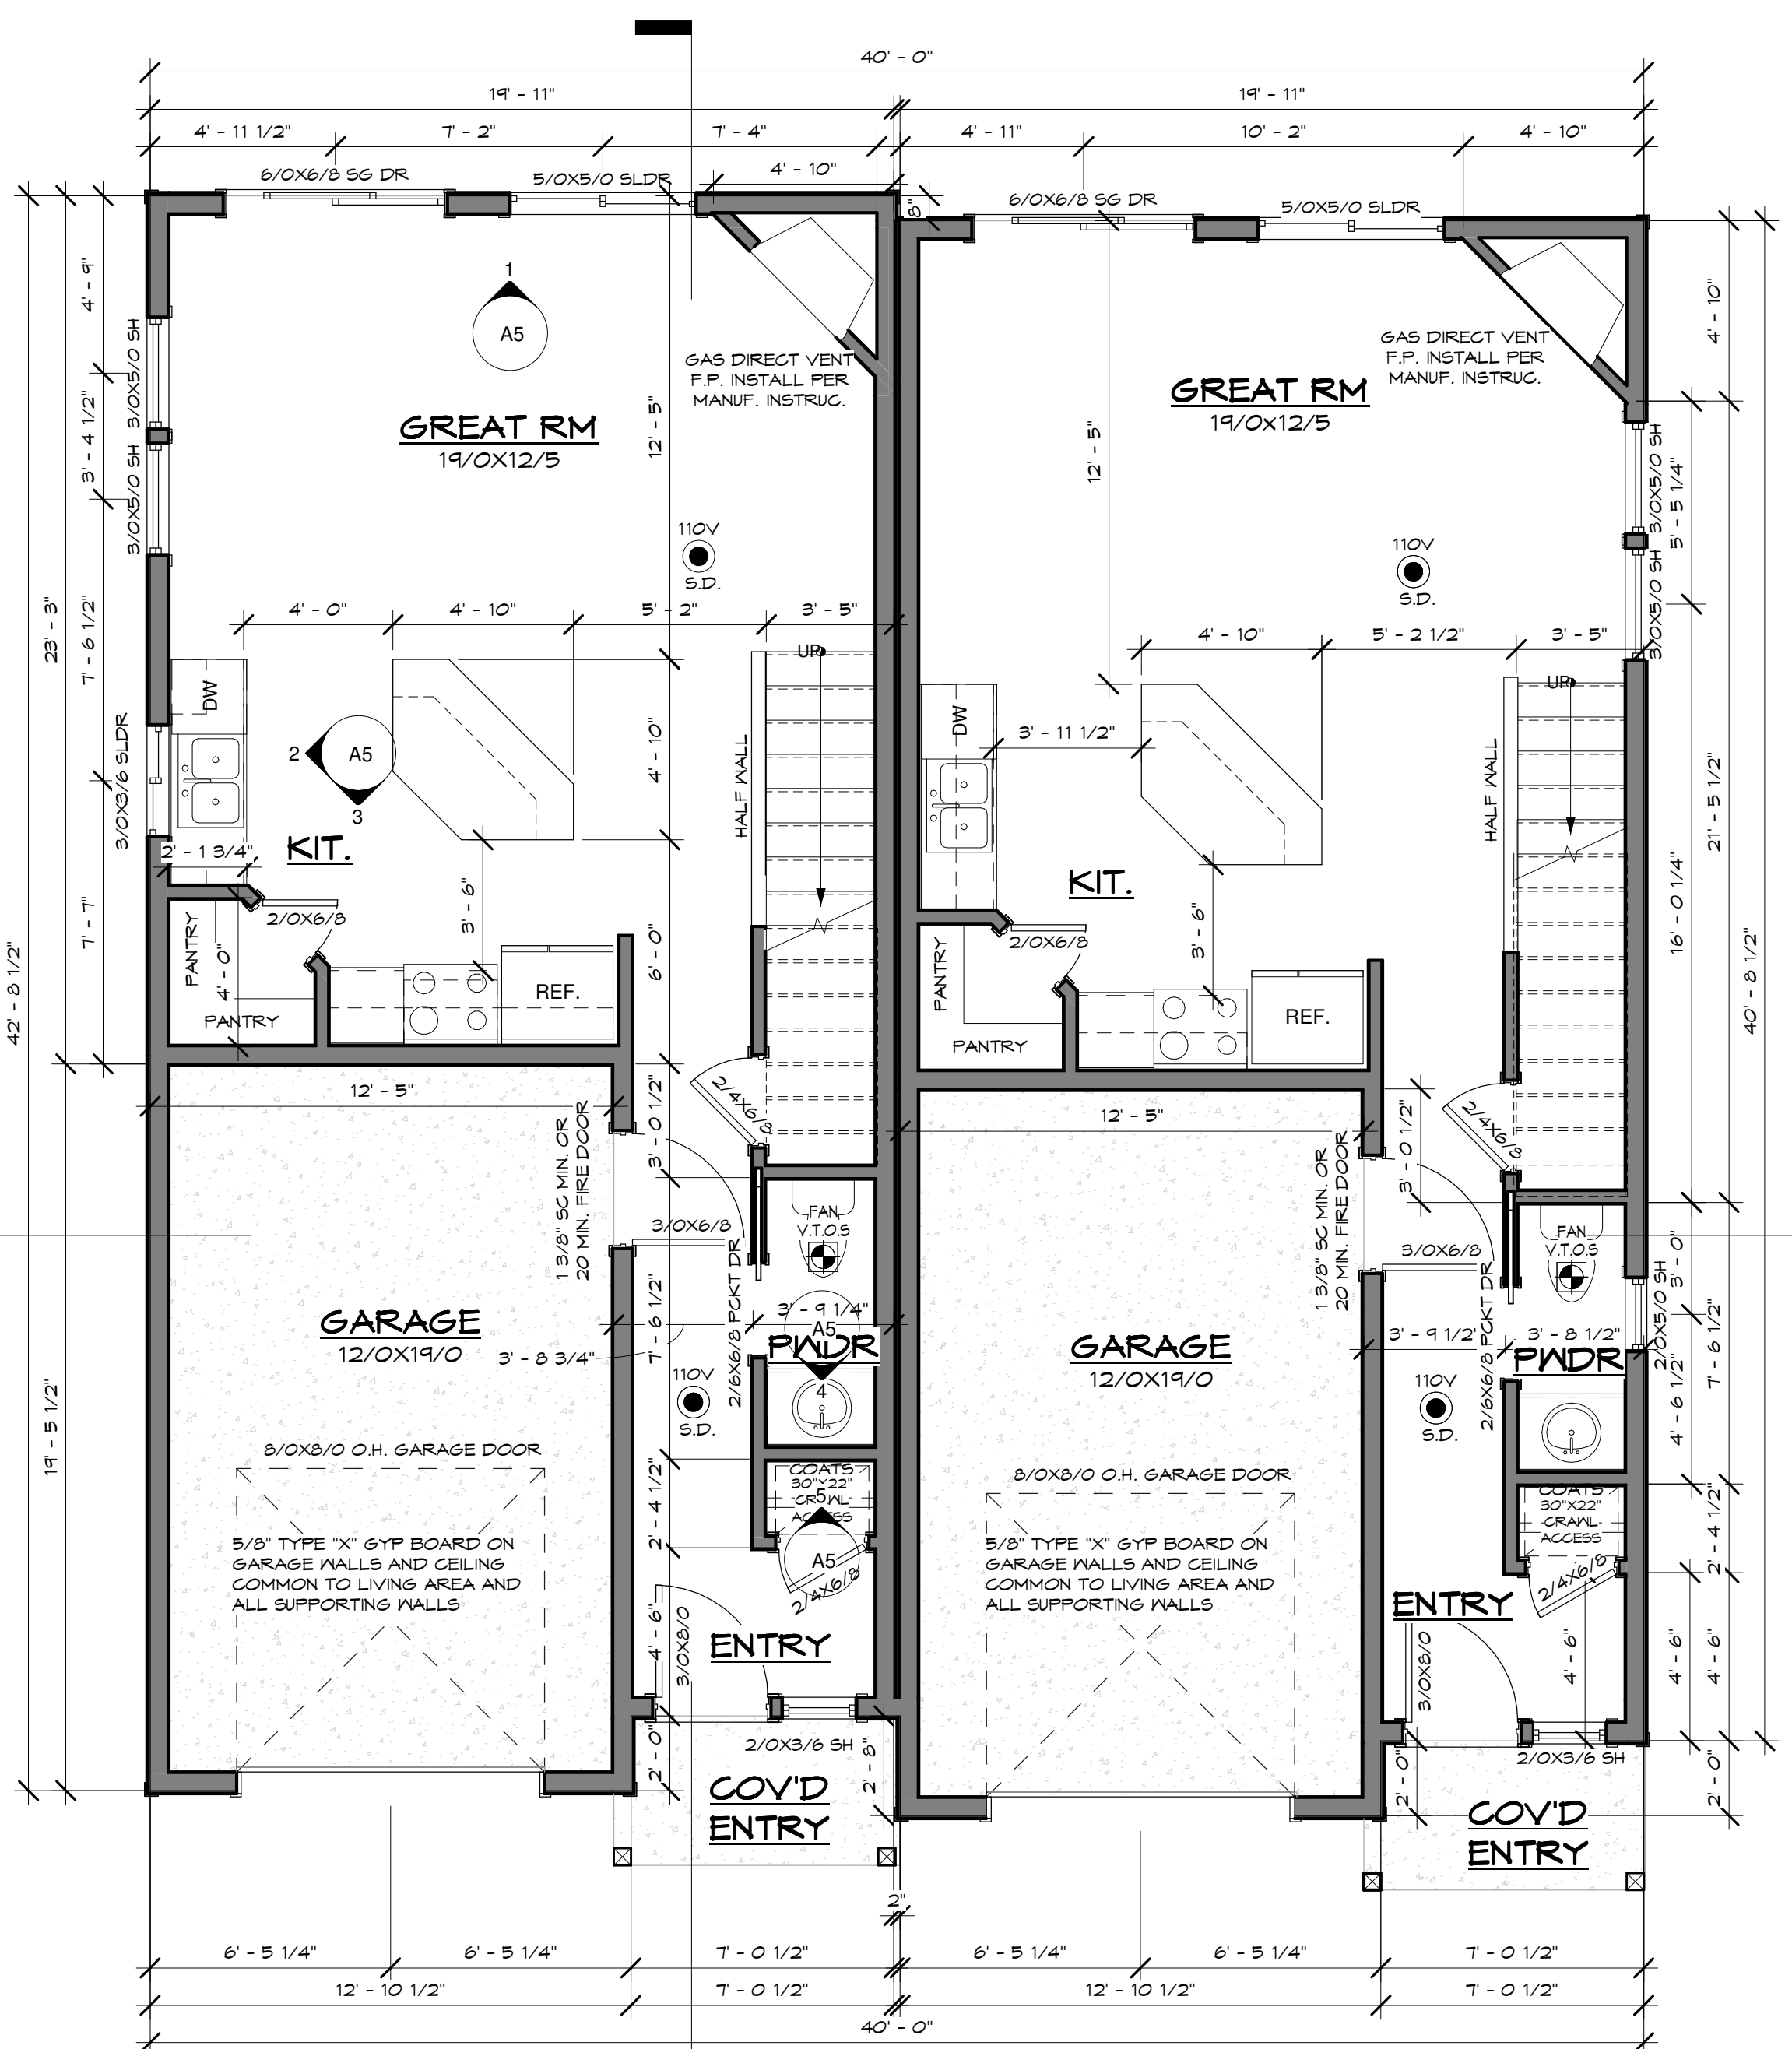

Main Floor Plan

1/4" = 1'-0"

FILE NAME :

1427-10-ST-L

DRAWN BY:

E DRAFTING

SCALE:

1/4" = 1'-0"

PLOT DATE :

8/22/2019

9:16:36 AM

Written dimensions on these drawings shall have precedence over scaled dimensions. Contractor shall assume responsibility for all dimensions and conditions on the job. The designer must be notified and consent to any variations from dimensions set forth herein. The type of exterior finish, the installation and waterproofing details are all to be the full responsibility of the owner/builder. This Designer assumes no responsibility for the integrity of the building envelope. This document is the property of E Drafting Corp. No reuse or reproduction is allowed without the written consent from E Drafting Corp.

SHEET
Floor Plans

A3